International Journal of Modern Studies in Mechanical Engineering (IJMSME)

Volume 11, Issue 1, 2025, PP 1-4

ISSN 2454-9711 (Online)

DOI: https://doi.org/10.20431/2454-9711.1101001

www.arcjournals.org



On Optimal Trajectory in Space Flight

S. ORLOV

Petrozavodsk State University, Petrozavodsk, 185001, Russia

*Corresponding Author: S. ORLOV, Petrozavodsk State University, Petrozavodsk, 185001, Russia

Abstract: Are investigated a trajectory of new type in distant, space flights unlike usual trajectories of direct flight to heavenly object (Moon) it is supposed to use asymmetry of a gravitational field and to carry out flight bypassing the most power gravitational impact on the spacecraft. It leads to economy of power for 20-30 %.

Keywords: The theory of vortex gravitation, space flights with an optimum trajectory.

1. Introduction

Now in a science there is a statement that force of gravitation is created by any body. According to this law force of gravitation decreases under the law of a return square of distance from this body **equally in all directions**.

In the theory of vortex gravitation [1] proposed study, the force of gravity - a force push, which is caused by the decrease in pressure in the space medium called ether. In turn pressure reduction in heavenly points is caused by vortex rotation of ether round these points, according to hydro aerodynamics laws. Speed of orbital rotation of streams of each whirlwind is inversely proportional to distance from square of center of this whirlwind.

As the whirlwind rotates in one plane, and the law of dependence of speed, pressure and force of gravitation from square of distance to the center of rotation of ether, operates too only in one plane of rotation of ether.

In [1] calculations are made to prove that point in the sky, which has a deviation from the plane of rotation of the ether, the gravitational force (push) acting on this point, is reduced in proportion to the cube of the distance to that point from the gravitational plane.

In general, the force of gravity can be calculated by the formula 26 [1] -

Fgv = Fgn Cos3
$$\varphi$$
, (1), where

Fgn - the force of gravity in the two-dimensional model (Eq. 10 in [1], which corresponds to the empirical formula for the law of universal gravitation Newton)

Fgv - the force of gravity in a three-dimensional vortex model.

 ϕ - the angle between the straight line connecting the center of the torsion from this point, and the plane gravitational torsion.

The location of the plane of cosmic torsion can determine the coordinates of celestial bodies - satellites of the torsion.

In the solar system, the heliocentric latitude, the gravitational torsion coincide with latitude of the center of the perihelion and aphelion of the orbits of all the planets.

The earth latitude, the gravitational torsion coincide with latitudes of apogee and perigee of the orbit of the moon.

Thus, the coordinates of the gravitational torsion, we can determine the coordinates of the plane in which the gravitational force decreases at the lower, that is inversely proportional to the square of the distance from the center of torsion. As Earth is in the center earth gravitational torsion, at removal

from it at distant space flights it is necessary to move to detour earth torsion, instead of on a direct trajectory, as in case of flight on the Moon.

The following shows the calculation of the physical work required to make the spacecraft during flight to the moon in two different routes.

Let's consider a problem of comparing the works expended on getting over the gravitation attraction forces (F) by a body, when traveling from point A to point C (see Fig.1) by the paths AC and ABC at two different $F(r, \varphi)$ dependences. The OAS line – a face projection gravitational torsion of Earth.

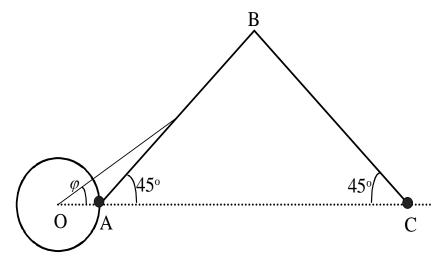


Fig1. Scheme of space flight

O - centre of Earth

A – start of flight

C – Moon (finish)

AC and ABC- projections of gravitational flats

Note: In Figure 1, AC and ABC lines do not show flight paths, but lateral projections of the planes in which these flights are performed.

In the first case, F is independent of φ and obeys the Newton law

$$F(r) = G \frac{m_1 \cdot m_2}{r^2} \tag{2}$$

where m_1 and m_2 are the masses of bodies, G – the gravitation constant, and r – the distance between the bodies.

In the second case, F depends on φ in accordance with formula (26) of [1]

$$F(r,\varphi) = G \frac{m_1 \cdot m_2}{r^2} \cdot \cos^3(\varphi)$$
 (3)

where φ is the angle between axis OC and the position radius-vector of the replaced body.

As is known, the work equals to the path integral

$$A = \int \vec{F} \cdot d\vec{r} \tag{4}$$

Let A_{AC} be the work expended at the transference AC for the case of the dependence (2). We determine the works A_{AB} and A_{BC} . For A'_{AC} being the work expended at the transference AC for the case of the dependence (2) we determine, respectively, the works A'_{AB} and A'_{BC} .

Now we write the integral (4) for each case

$$A_{AC} = \int_{r_1}^{r_2} G \cdot \frac{m_1 \cdot m_2}{r^2} dr$$
(5)

$$A_{AB} = \int_{0}^{\varphi_{BOC}} G \cdot \frac{m_1 \cdot m_2 \cdot (\cos(\varphi) - \sin(\varphi)) \cdot \cos(\frac{3 \cdot \pi}{4} + \varphi)}{r_1 \cdot \sin(\frac{\pi}{4} - \varphi)} d\varphi$$
(6)

$$A_{BC} = \int_{0}^{\varphi_{BOC}} G \cdot \frac{m_1 \cdot m_2 \cdot (\cos(\varphi) + \sin(\varphi)) \cdot \cos(\frac{\pi}{4} + \varphi)}{r_2 \cdot \cos(\frac{\pi}{4} - \varphi)} d\varphi$$
(7)

$$A'_{AC} = A_{AC} \tag{8}$$

$$A'_{AB} = \int_{0}^{\varphi_{BOC}} G \cdot \frac{m_1 \cdot m_2 \cdot (\cos(\varphi) - \sin(\varphi)) \cdot \cos(\frac{3 \cdot \pi}{4} + \varphi) \cdot \cos^3(\varphi)}{r_1 \cdot \sin(\frac{\pi}{4} - \varphi)} d\varphi$$
(9)

$$A'_{BC} = \int_{0}^{\varphi_{BOC}} G \cdot \frac{m_1 \cdot m_2 \cdot (\cos(\varphi) + \sin(\varphi)) \cdot \cos(\frac{\pi}{4} + \varphi) \cdot \cos^3(\varphi)}{r_2 \cdot \cos(\frac{\pi}{4} - \varphi)} d\varphi$$
(10)

where r_1 – the distance OA, r_2 – OC, and φ_{BOC} – the angle BOC.

Formula (8) is valid because, in this direction, the forces (5) and (6) are equal to each other.

Calculating the integrals (7-10) numerically for the case of moonflight (r_1 =6400·10³ m, r_2 =40000000m, m_2 =6·10²⁴ kg, m_1 =1 kg), one obtains A_{AC} = 6.1554643·10³ J, A_{AB} = 6.1140242·10³ J, A_{BC} = 4.1440045·10⁴ J, A_{AB} = 4.5279719·10³ J, A_{BC} = 3.5727542·10⁵ J.

One can see that $A_{AC}=A_{AB}+A_{BC}$, which just must be the case for the Newtonian forces when the work does not depend on the transference path from point A to point C.

In the case of the law (3), the work on the path ABC equals to A'_{ABC}= A'_{AB} +A'_{BC}= $4.5636994 \cdot 10^7$ J. This is less than the work A'_{AC} = A_{AC} = $6.1554643 \cdot 10^7$ J.

The ratio (decrease) of the works is $s=A'_{ABC}/A_{AC}=0.7414062$. The value of s depends on the distances r_1 and r_2 and on the transference path.

Thus, the transference by the path ABC in the case of the law (3) is more energetically preferable than that directly by the path AC.

The above calculation shows that the moonflight with a detour of the Earth torsion should decrease the fuel consumption on 25%.

At present, most interplanetary cosmic apparatus get accelerations which can not be explained on the basis of cosmic calculations in the relativity theory of Einstein. Particularly, deviations have been found for the apparatus of «Galileo», «Rosetta» and «Cassini». The suggested model of vortex gravitation (formula 3) shows that, if the trajectory of the satellite flight does not coincide with the Sun gravitation torsion plane, then one should take into account the value of gravitation coefficient in the calculation of solar gravity acting onto the satellites. This coefficient (Cos3 φ) reduces the value of solar gravity, which gives a certain acceleration to cosmic satellites and results in a deviation of the motion trajectory.

REFERENCE

 S. Orlov. Foundation of vortex gravitation, cosmology and cosmogony. Global journal of science Frontier research. Physic and Space Science. Volume 12 issue 1 Version 1.0 January 2012. https://globaljournals.org/GJSFR_Volume12/3-Foundation-of-vortex-gravitation-cosmology.pdf

Citation: S. ORLOV (2025). On Optimal Trajectory in Space Flight "International Journal of Modern Studies in Mechanical Engineering (IJMSME)", 11(1), pp.1-4, DOI: https://doi.org/10.20431/2454-9711.1101001.

Copyright:© 2025 S.ORLOV. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.